


## Capabilities Bulletin

### **CB 0017**

### **Belden® Classics**

Belden's Classic Line includes a select number of high quality, high reliability Multi-conductor and Paired Cables. These known performers meet or exceed UL standards and have been used worldwide for decades.

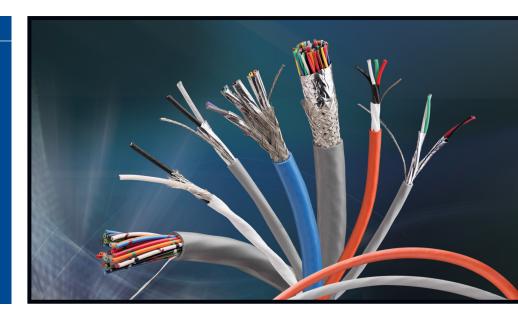

Belden Classics Cables
Provide Best-in-class
Performance for a Wide
Range of Applications:
Industrial, Video, Sound and
Security, and Interconnect

Belden Classic products are manufactured in a wide variety of gauge (AWG) sizes, insulation materials, shielding configurations, and jacketing materials, including Plenum and High-temperature versions. These Multi-conductor and Paired products offer best-in-class performance and reliability in many different systems.

Features/benefits of the Classic line include:

- Unsurpassed quality and reliability
- Robust designs that meet or exceed UL standards
- Proven performance in installations worldwide
- Broad range of AWG sizes, shielding options, conductor and pair counts
- Convenient put-up options
- Polyolefin insulations provide lower capacitance performance when compared to cables with PVC insulations
- Tefzel, TFE and FEP insulation and jacket constructions offer higher temperature ratings
- Global availability through a network of Belden distributors

## **Shielding**

Belden meets the demand for highly effective shielding technology with innovative, EMI/RFI-protective foil and braid designs like Beldfoil®. Belden's patented Beldfoil shield is an aluminum/polyester foil construction that yields a light-weight, strong, flexible and thin shield that provides extra insulation and 100% shield coverage.

Beldfoil is ideally suited for multiple-pair, individually shielded audio, communication, and data cables.

#### **Product Consistency**

By manufacturing our products in ISO-certified, state-of-the-art manufacturing facilities, Belden assures that quality is built into each and every product. Precise diameter control of insulation and jacket diameters and concentric wall thickness assures fast, reliable manufacturing in high-speed automated equipment, and ease of termination and assembly in the field.

#### **Cable Performance Benefits**

Belden offers one of the broadest lines of UL Listed, NEC and CEC multi-conductor cables available from any single source. Paired designs allow balanced signal transmission which results in lower crosstalk through common mode rejection. Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than traditional multi-conductor cables.

Belden Multi-conductor and Paired products deliver low voltage analog data signals within enclosures, from controllers and I/Os to devices such as temperature and pressure sensors, relays, valves, meters, thermocouples, solenoids, actuators, contacts, push buttons, and alarms. They also are applicable for computers, communications, instrumentation, sound, control, audio, data transmission, and many more applications.

Be Certain with Belden



## **Applications and Selection Criteria for Belden Classics**

Because of the wide array of industry standards and approvals garnered by the Belden Classic product line, it is suitable for many applications, which include, but are not limited to:

- RS-232, RS-422/423, & RS-485 -Computer & CAD / CAM
- Low speed data communication from microprocessor to device utilizing simple commands (On, Off, Stop, Start)
- Control & Instrumentation
  - Analog signals for machine control (Sensors, Valves, Switches)
- Fire Alarm/Security
  - Detection monitoring systems for fire and intrusion
- Power Supply
- Low voltage power and control of devices

#### Audio

- Analog signals for system and speaker interconnection
- Computer/P.O.S.
- Low speed data for Point-of-Sale equipment

In any cable installation the conductor, insulation, jacket, and shielding are all important attributes that must be carefully selected when determining the proper cable construction. These physical attributes can determine the UL listing, temperature rating, voltage rating, signal attenuation, cable impedance, and cable capacitance – some or all of which may be of importance to your installation. Belden's broad Classics Cable offering will frequently feature the specific construction that you are looking for as a standard product.

#### **Conductor Selection**

The type of conductor selected is very important for the integrity of the cable. For example, if it is a fixed installation, solid conductors may be used. However, any system that requires motion (i.e., flexing of the cable) should be installed with a cable that has stranded conductors.

The size of the conductor is also an important consideration. Its selection should be based primarily on the amount of current that will need to flow through it, the equipment being used, the temperature of the area where the installation is located, and the number of conductors required. Additionally, the size of the conductor will rely on the amount of signal attenuation that the system can tolerate. This will only be a factor for applications that require long runs of cable (e.g., CCTV applications). The table below outlines the ideal strand counts for different conductor AWG sizes for various applications.


### **Ideal Strand Counts For Different Conductor Sizes**

				American Wire	e Gauge (AWG)			
Typical Application	12	14	16	18	20	22	24	26
Fixed Services Hook-up Wire Cable in Raceway	19x25	Solid or 19x27	Solid or 19x29	Solid or 7x26 or 16x30	Solid or 7x28 or 10x30	Solid or 7x30	Solid or 7x32	Solid or 7x34
Moderate Flexing Frequently Disturbed For Maintenance	65x30	19x27 or 42x30	19x29 or 26x30	16x30 or 42x34	7x28, 10x30, 19x32 or 26x34	7x30 or 19x34	7x32 or 10x34	7x34
Severe Flexing Microphone Test Prods	165x34	105x34	65x34 or 105x36	42x34 or 65x36	26x34 or 42x36	19x34 or 26x36	19x36 or 42x40	7x34 or 10x36
Most Severe Duty Mercury Switches	259x36 (7x37 Rope Lay)*	168x36 (7x24 Rope Lay)*	105x36 (7x15 Rope Lay)*	63x36 (7x9 Rope Lay)*	105x40 (3x35 Rope Lay)*	(Consider Braid or		insel)

Note: For a given AWG wire size (based on equal cross-sectional area of conductor), limpness and flex life are increased by use of a large number of fine strands.

<sup>\*</sup>Rope lay is several stranded groups cabled together. For example: 12 AWG, 259x36 is 7 cords each consisting of 37 strands of 36 AWG.

## Be Certain with Belden



### **Insulation and Jacket Selection**

The insulation and jacket should be chosen largely based on the temperature and

environment in which the system is present, just like the applications discussed previously. The tables below identify which compounds

are suitable (or not suitable) for a wide array of different environmental conditions, which can be present in various vertical markets.

## **Comparative Properties of Plastic Insulating and Jacketing Compounds**

Properties	PVC	LDPE	Cellular Polye- thylene	HDPE	Polypro pylene	Cellular Polypro- pylene	PUR	Nylon	CPE	Flamarrest®	FEP Teflon®	Tefzel® (ETFE)	PTFE Teflon	Solef®/ Kynar® (PVDF)/ PVF	Halar® (E-CTFE)
Oxidation Resistance	Е	Е	Е	E	Е	Е	E	Е	E	Е	0	Е	0	0	0
Heat Resistance	G–E	G	G	E	Е	Е	G	Е	E	G–E	0	Е	0	0	0
Oil Resistance	F	G–E	G	G–E	F	F	Е	Е	Е	F	0	Е	E-0	Е	0
Low-Temperature Flexibility	P-G	E	E	E	Р	Р	G	G	Е	P-G	0	Е	0	F	0
Weather, Sun Resistance	G–E	E	E	E	Е	Е	G	Е	E	G	0	Е	0	E-0	0
Ozone Resistance	Е	Е	Е	E	Е	Е	E	Е	Е	Е	Е	Е	0	Е	Е
Abrasion Resistance	F–G	G	F	E	F–G	F–G	0	Е	E-0	F–G	Е	Е	0	Е	Е
Electrical Properties	F–G	Е	Е	E	Е	Е	Р	Р	Е	G	Е	Е	Е	G–E	Е
Flame Resistance	Е	Р	Р	Р	Р	Р	Р	Р	Е	Е	0	G	Е	Е	E-0
Nuclear Radiation Resistance	F	G–E	G	G–E	F	F	G	F–G	0	F	P–G	Е	Р	Е	Е
Water Resistance	F–G	Е	Е	Е	Е	Е	P–G	P–F	0	F	Е	Е	Е	Е	Е
Acid Resistance	G–E	G–E	G–E	Е	Е	Е	F	P–F	E	G	Е	E	Е	G–E	Е
Alkali Resistance	G–E	G–E	G–E	Е	Е	Е	F	Е	Е	G	Е	Е	Е	Е	Е
Aliphatic Hydrocarbons Resistance (Gasoline, Kerosene, etc.)	Р	G–E	G	G–E	P–F	Р	P–G	G	E	Р	E	E	Е	E	Е
Aromatic Hydrocarbons Resistance (Benzol, Toluol, etc.)	P–F	Р	Р	Р	P–F	Р	P–G	G	G–E	P–F	Е	E	E	G–E	E
Halogenated Hydrocarbons Resistance (Degreaser Solvents)	P–F	G	G	G	Р	Р	P–G	G	Е	P–F	Е	E	E	G	E
Alcohol Resistance	P–F	Е	E	E	E	Е	P–G	Р	Е	G	E	Е	Е	Е	Е
Underground Burial	P-G	G	N/A	Е	N/A	N/A	G	Р	E-0	Р	Е	Е	Е	Е	Е

CPE = Chlorinated Polyethylene • HDPE = High-density Polyethylene • LDPE = Low-density Polyethylene • PUR = Polyurethane

These ratings are based on average performance of general purpose compounds. Any given property can usually be improved by the use of selective compounding.

Teflon and Tefzel are DuPont trademarks.

Halar is a Solvay Solexis trademark. Solef is a Solvay trademark.

Kynar is a Atofina Chemical Corporation trademark.

## Legend P Poor **F** Fair **G** Good E Excellent 0 Outstanding

## **Comparative Properties of Rubber Insulations**

Properties	Rubber	Neoprene	CSPE*	EPDM	Silicone
Oxidation Resistance	F	G	Е	Е	Е
Heat Resistance	F	G	E	Е	0
Oil Resistance	Р	G	G	Р	F–G
Low-Temperature Flexibility	G	F–G	F	G–E	0
Weather, Sun Resistance	F	G	E	E	0
Ozone Resistance	Р	G	E	Е	0
Abrasion Resistance	Е	G–E	G	G	Р
Electrical Properties	G	Р	G	E	G
Flame Resistance	Р	G	G	Р	F–G
Nuclear Radiation	F	F-G	Е	G	Е
Resistance					
Water Resistance	G	E	E	G–E	G–E
Acid Resistance	F-G	G	E	G–E	F–G
Alkali Resistance	F–G	G	E	G–E	F–G
Aliphatic Hydrocarbons Resistance (Gasoline, Kerosene, etc.)	Р	G	F	Р	P–F
Aromatic Hydrocarbons Resistance (Benzol, Toluol, etc.)	Р	P–F	F	F	Р
Halogenated Hydrocarbons Resistance (Degreaser Solvents)	Р	Р	P–F	Р	P–G
Alcohol Resistance	G	F	G	Р	G

## **Nominal Temperature Range for Various Insulating and Jacketing Compounds**

Compound	Normal Low	Normal High	Special Low	Special High
Chlorosulfonated Polyethylene (Hypalon®)	-20°C	90°C	-40°C	105°C
EPDM (Ethylene-Propylene-Diene Monome	r) -55°C	105°C	_	150°C
Neoprene	-20°C	60°C	-55°C	90°C
Polyethylene (Solid and Foamed)	-60°C	80°C	_	_
Polypropylene (Solid and Foamed)	-40°C	105°C	_	_
Rubber	-30°C	60°C	-55°C	75°C
FEP Teflon®	-70°C	200°C	_	_
PVC	-20°C	80°C	-55°C	105°C
Silicone	-80°C	150°C	_	200°C
Halar <sup>®</sup>	-70°C	150°C	_	_
Tefzel®	-65°C	150°C	_	_
PTFE Teflon	-70°C	260°C	_	_
CPE	-35°C	90°C	-45°C	105°C
Solef®/Kynar®	-20°C	150º/125ºC	-40°C	150º/150ºC
Flamarrest <sup>o</sup>	-20°C	75℃	_	_

<sup>\*</sup> Formerly Hypalon - a DuPont trademark.

#### **Shield Selection**

The selection of shielding is also critical to the application for which the cable will be installed. While unshielded cables should be satisfactory for most alarm circuits, DC control lines, and low impedance lines, shielding is normally required for closed-circuit television (CCTV), microphone lines, and other high-impedance, low-level signals. For installations where noise or other electrical interference could be problematic, shielding should be used to prevent external signals from entering the cable, and vice versa. The table at right illustrates different types of shields and their features and benefits.

### **Cable Impedance**

While most installations may not have requirements for the capacitance or impedance of the cable, it could potentially become a factor with CCTV or data transmission systems. If the impedance of the cable is not matched to the impedance of the system (e.g. CCTV monitor), then there could be a degradation of the performance of the system. Moreover, these systems (like most data transmission systems) may require cables with low capacitance in order to function properly.

### **Cable Shield Qualities**

	Copper Braid	Copper Wrapped	Conductive Textile	Aluminum Polyester	Conductive Plastic	Foil & Braid
Shield Effectiveness at Audio Frequencies	Good	Good	Fair	Excellent	Good	Excellent
Shield Effectiveness at Radio Frequencies	Good	Poor	Poor	Excellent	Poor	Excellent
Normal Percent of Coverage	60-95%	90-97%	100%	100%	100%	100%
Fatigue Life	Good	Fair	Excellent	Fair*	Good	Good
Tensile Strength	Excellent	Fair	Poor	Poor	Poor	Good
Termination Method	Comb & Pigtail	l Pigtail	Drain Wire	Drain Wire	Drain Wire	Comb &
	_					Pigtail

<sup>\*</sup> Special techniques can provide excellent fatigue life for use in high flex applications

## **Unique Story**

Several years ago, Belden's engineering team demonstrated that despite the short transmission distance that typically hampers the use of RS-232 transmission, our cables could help the customer reach even greater distances. The study looked at some of our more popular designs, and even with the limitation of transmitting data over a network at full utilization that experiences crosstalk, the cables still functioned at remarkable distances some at an order of magnitude higher than the norm

Customary transmission distance ~ 65 feet. Belden cables exceed this distance by a healthy margin. even at full utilization with crosstalk:

- 9948 Series → at least 400 feet
- 9543 Series → at least 400 feet
- 9836 Series → at least 658 feet
- 9937 Series → at least 824 feet • 8112 Series → at least 833 feet
- Transmission distance is one of the greatest limitations of RS-232 serial data transmission and Belden cables help overcome it!

## **Belden Classic Computer Cables - High and Low Temperature**

5	hieldin	g	Ove	erall Beldfoil			Overall	Foil/Braid	Individual Foil	Individual Foil + Overall Foil/Braid
lı	nsulatio	n	SRPVC, PVC or FEP	PE (15.5 pF/ft)	Datalene or FFEP (11.0-13.5 pF/ft)	SRPVC	PE, PP, or FEP (15.5 pF/ft)	Datalene, PE, or FFEP (11.0-13.5 pF/ft)	Datalene or <b>FFEP</b> (11.0-13.5 pF/ft)	Datalene or FFEP (11.0-13.5 pF/ft)
AWG	Cond	Pair								
28		2			8132F01,4		98041, 2	8132 <sup>1, 4</sup>		
		3					9805 <sup>1, 2</sup>	8133 <sup>1, 4</sup>		
		4			8134F0 <sup>1, 4</sup>		9806 <sup>1, 2</sup>	8134 <sup>1, 4</sup>		
		5			8135F0 <sup>1, 4</sup>		98071,2	8135 <sup>1, 4</sup>		
		7					9808 <sup>1, 2</sup>			
		8			8138F0 <sup>1, 4</sup>			8138 <sup>1, 4</sup>		
		9					9809 <sup>1, 2</sup>			
		12					9812 <sup>1, 2</sup>			
		12½			8142F0 <sup>1, 4</sup>			8142 <sup>1, 4</sup>		
		13					9813 <sup>1, 2</sup>			
		18					9819 <sup>1, 2</sup>	8148 <sup>1, 4</sup>		
		25					98251,2	8155 <sup>1, 4</sup>		
		31					9814 <sup>1, 2</sup>			
26	4		1211A⁵							
	6		1212A⁵							
	8		1213A⁵							
	16									

- BS-422 (100 Ohm Impedance)
- RS-423 (100 0hm Impedance)
- RS-485 (120 0hm Impedance)
- 5 Molex SEMMCONN and AMP
- SDI Connectors
- 6 Digital Audio Applications 7 Computer P.O.S.
- Low Temperature **High Temperature**
- Solid Conductors
- 75 Ohm Impedance †† 70 Ohm Impedance

# Be Certain with Belden



## **Belden Classic Computer Cables - High and Low Temperature** (continued)

	Sh	ielding	ı	Ove	rall Beldfoil			Overall I	Foil/Braid	Individual Foil	Individual Foil + Overall Foil/Braid
	Ins	ulation	ı	SRPVC, PVC or FEP	PE (15.5 pF/ft)	Datalene or FFEP (11.0-13.5 pF/ft)	SRPVC	PE, PP, or FEP (15.5 pF/ft)	Datalene, PE, or FFEP (11.0-13.5 pF/ft)	Datalene or FFEP (11.0-13.5 pF/ft)	Datalene or FFEP (11.0-13.5 pF/ft)
۸۷	VG (	Cond	Pair			(The Tole print)		(roto privity			
2		3	ı alı	9533¹			9608¹	99251,3			
	`  -	4		9534 <sup>1</sup>			9609 <sup>1</sup>	9927 <sup>1, 3</sup>			
		5		9535 <sup>1</sup>			9610 <sup>1</sup>	99291,3			
		6		9536 <sup>1</sup>			9611 <sup>1</sup>	99311,3			
		7		9537 <sup>1</sup>			96121	99321,3			
		8		9538 <sup>1</sup>			96131	99331,3			
		9		9539 <sup>1</sup>			96141	9934 <sup>1, 3</sup>			
		10		9540 <sup>1</sup>			9615 <sup>1</sup>	99351,3			
		15		9541 <sup>1</sup>			9616¹	99361,3			
	L	20		9542 <sup>1</sup>							
	L	25		9543 <sup>1</sup>			9617¹	9937 <sup>1,3</sup>			
	⊢	30		9544 <sup>1</sup>							
	$\vdash$	37		05.451			9618¹	99381,3			
	$\vdash$	40	-	9545 <sup>1</sup>			00101				
	$\vdash$	50	_	9546 <sup>1</sup>			9619¹		00444 000444 000444		
	$\vdash$	$\rightarrow$	1	9501 <sup>†,1</sup> 88641 <sup>1</sup> 82641 <sup>1</sup>					98414 898414 828414	007001 2 6	
			2	9502 <sup>†, 1</sup> 82502 <sup>1</sup>		1419A <sup>1,2</sup> 88102 <sup>1,2</sup>	8332 <sup>†, 1</sup>	98291,2	9842 <sup>4</sup> 89842 <sup>4</sup> 82842 <sup>4</sup> 8102 <sup>1, 2</sup>	9729 <sup>2,6</sup> 89729 <sup>1,2,6</sup> 82729 <sup>1,2,6</sup>	8162 <sup>1, 2, 6</sup>
	$\vdash$		3	9503 <sup>†,1</sup> 89503 <sup>1</sup> 82503 <sup>1</sup>	9680 <sup>1, 2</sup>	1420A <sup>1, 2</sup> 88103 <sup>1, 2</sup>	8333 <sup>†, 1</sup>	9830 <sup>1, 2</sup>	9843 <sup>4</sup> 8103 <sup>1, 2</sup>	9730 <sup>2,6</sup> 89730 <sup>1,2,6</sup>	81631, 2, 6
	$\vdash$		4	9504 <sup>†,1</sup> 89504 <sup>1</sup> 82504 <sup>1</sup>	9681 <sup>1, 2</sup>		8334 <sup>†, 1</sup>	9831 <sup>1,2</sup>	9844 <sup>4</sup> 8104 <sup>1,2</sup>	9728 <sup>2,6</sup> 89728 <sup>1,2,6</sup>	8164 <sup>1, 2, 6</sup>
	$\vdash$	-+	5	9505 <sup>†,1</sup> 89505 <sup>1</sup> 82505 <sup>1</sup>	9001"-	1422A <sup>1,2</sup> 88105 <sup>1,2</sup>	8335 <sup>†, 1</sup>	9832 <sup>1, 2</sup>	8105 <sup>1,2</sup>	89705 <sup>1, 2, 6</sup>	8165 <sup>1, 2, 6</sup>
	$\vdash$	-	6	9506 <sup>†, 1</sup> 82506 <sup>1</sup>	9682 <sup>1, 2</sup>	1423A <sup>1,2</sup> 88106 <sup>1,2</sup>	8336 <sup>†, 1</sup>	9839 <sup>1, 2</sup>	8106 <sup>1, 2</sup>	9731 <sup>2,6</sup> 89731 <sup>1,2,6</sup>	8166 <sup>1, 2, 6</sup>
	$\vdash$	$\neg$	7	9507 <sup>†, 1</sup>	3002	1423A 00100 ·	8337 <sup>†, 1</sup>	9833 <sup>1, 2</sup>	8107 <sup>1,2</sup>	897571,2,6	8167 <sup>1, 2, 6</sup>
	$\vdash$		7½	3001		881071,2	0007	3000	0107	03707	0107
		$\neg$	8	9508 <sup>†, 1</sup>		00101			81081,2		81681, 2, 6
			9	9509 <sup>†, 1</sup> 82509 <sup>1</sup>	9683 <sup>1, 2</sup>	88109 <sup>1, 2</sup>		98341,2	0.00	97322,6 897321,2,6	0.00
			10	9510 <sup>†, 1</sup>	0000	00100	8340 <sup>†, 1</sup>	9835 <sup>1, 2</sup>	8110 <sup>1, 2</sup>	0.02	8170 <sup>1, 2, 6</sup>
			12					9836 <sup>1, 2</sup>		97342,6 897341,2,6	
			12½	82512 <sup>1</sup>	96841,2	1424A <sup>1,2</sup> 88112 <sup>1,2</sup>	8342 <sup>†, 1</sup>		8112 <sup>1, 2</sup>		
			15	9515 <sup>†, 1</sup>		1425A <sup>1, 2</sup>	8345 <sup>†, 1</sup>		8115 <sup>1, 2</sup>	9735 <sup>2, 6</sup>	8175 <sup>1, 2, 6</sup>
			17							9736 <sup>2, 6</sup>	
	L		18				8348 <sup>†, 1</sup>	9837 <sup>1, 2</sup>	8118 <sup>1, 2</sup>	897581, 2, 6	8178 <sup>1, 2, 6</sup>
	L		18½			88118 <sup>1, 2</sup>					
	$\perp$	_		9519 <sup>†, 1</sup>						9737 <sup>2, 6</sup>	
	⊢		25	9525 <sup>†, 1</sup>		88125 <sup>1, 2</sup>	8355 <sup>†, 1</sup>		8125 <sup>1, 2</sup>		8185 <sup>1, 2, 6</sup>
	$\vdash$	$\rightarrow$	27	0550± 1						9738 <sup>2, 6</sup>	
_			50	9550 <sup>†, 1</sup>							
2	2  _	3					9939¹				
	⊢	4					9940¹				
	$\vdash$	5					99411				
	$\vdash$	6	-				99421				
	$\vdash$	7 8	_				9943 <sup>1</sup> 9944 <sup>1</sup>				
	$\vdash$	9	-				9944¹ 9945¹				
	H	10	-				9945 <sup>1</sup>				
		15	-				99471				
		25					9948 <sup>1</sup>				
		37					9949 <sup>1</sup>				
		50					9950¹				
			_					1268A <sup>7,*</sup> 9855 <sup>7,*</sup> 9696 <sup>7,*</sup>			
		- 1	2				8302 <sup>††, 1</sup>	1269A <sup>7,*</sup> 89855 <sup>7,*</sup> 89696 <sup>7,*</sup>			
			3				8303 <sup>††, 1</sup>				
			4				8304††,1				
			5				8305 <sup>††, 1</sup>				
			6				8306††,1				
			7				8307 <sup>††, 1</sup>				
			8				8308††, 1				
			10				8310 <sup>††, 1</sup>				
			12				8312 <sup>††, 1</sup>				
			15				8315††,1				
	I	-	18				8318††,1				
			25				8325 <sup>††, 1</sup>		l .		

<sup>1</sup> RS-232 2 RS-422 (100 0hm Impedance) 3 RS-423 (100 0hm Impedance) 4 RS-485 (120 0hm Impedance)

<sup>5</sup> Molex SEMMCONN and AMP SDL Connectors

<sup>6</sup> Digital Audio Applications 7 Computer P.O.S.

BLACK Low Temperature RED High Temperature

<sup>\*</sup> Solid Conductors † 75 Ohm Impedance

<sup>†† 70</sup> Ohm Impedance



# Belden Classic Audio, Control and Instrumentation Cables — High and Low Temperature

S	hieldin	g	Unshielded	Overall Beldfoil	Overall Foil/Braid	Individual Foil	Overall Braid
AWG	Cond	Pair					
24	1						83304E <sup>7</sup>
	2						83318E <sup>7</sup>
	3				835031		83333E <sup>7</sup>
	4				83504¹		83348E <sup>7</sup>
	6				83506 <sup>1</sup>		
	9 12				83509 <sup>1</sup> 83512 <sup>1</sup>		
	15				83515 <sup>1</sup>		
	10	1		86411 886411 826411	00010		
		2	9562 <sup>1,*</sup>	0041 00041 02041			
		3				9990¹	
		6	9566 <sup>1,*</sup>			9991 <sup>1</sup>	
		9				9992 <sup>1</sup>	
		10	9570 <sup>1,*</sup>				
		12	05051 *			99931	
		25	9585 <sup>1,*</sup>			99951	
22	1	_	0.4401 0.7051 1.004401 0.24401	000042	005501		83305E <sup>7</sup> 9965 <sup>8</sup>
	2	_	8442 <sup>1</sup> 8795 <sup>1,*</sup> 88442 <sup>1</sup> 82442 <sup>1</sup> 8443 <sup>1</sup> 8794 <sup>1,*</sup>	83394 <sup>2</sup> 83395 <sup>2</sup> 9770 <sup>1</sup> 8771 <sup>1</sup>	83552 <sup>1</sup>		83319E <sup>7</sup> 9966 <sup>8</sup>
	3		8443 <sup>1</sup> 8794 <sup>1,*</sup> 8444 <sup>1</sup> 9794 <sup>1,*</sup> 88444 <sup>1</sup> 82444 <sup>1</sup>	83396 <sup>2</sup>	83553 <sup>1</sup> 83554 <sup>1</sup>		83334E <sup>7</sup> 8735 <sup>1</sup> 9967 <sup>8</sup> 83349E <sup>7</sup> 9968 <sup>8</sup>
	5		8445 <sup>1</sup>	00000	03334		03349E 9900°
	6		9576 <sup>6,*</sup>		83556¹		
	7		9430¹		00000		
	8		94211				
	9		9423 <sup>1</sup>		83559 <sup>1</sup>		
	10		84561				
	12		84571		835621		
	15		8458 <sup>1</sup>		005001		
	19 20		9431 <sup>1</sup>		83569¹		
	25		8459 <sup>1</sup>				
	30		94321				
	40		9433¹				
	50		9434 <sup>1</sup>				
		1	8740 <sup>1</sup> ,* 88442 <sup>1</sup> 82442 <sup>1</sup>	9414 <sup>1</sup> 9462 <sup>1</sup> 8761 <sup>1</sup> 9461 <sup>1</sup> 87761 <sup>1</sup> 82761 <sup>1</sup>			
		2	8741 <sup>1,*</sup> 9744 <sup>1</sup> 88741 <sup>1</sup> 82741 <sup>1</sup>	93021.* 91841.*		9406 <sup>1</sup> 8723 <sup>1</sup> 87723 <sup>1</sup> 82723 <sup>1</sup>	
		3	8742 <sup>1,*</sup> 9745 <sup>1</sup> 82742 <sup>1</sup>			8767 <sup>1,*</sup> 8777 <sup>1</sup> 8777NH <sup>1</sup> 87777 <sup>1</sup> 82777 <sup>1</sup>	
		4	8757 <sup>1,*</sup> 9746 <sup>1</sup> 88757 <sup>1</sup> 82757 <sup>1</sup>	9305 <sup>1,*</sup>			
		6	8743 <sup>1,*</sup> 8747 <sup>1</sup> 82743 <sup>1</sup>	9306 <sup>1,*</sup>		8768 <sup>1,*</sup> 8778 <sup>1</sup> 87778 <sup>1</sup> 82778 <sup>1</sup>	
		8	9160 <sup>1,*</sup>				
		9	8744 <sup>1,*</sup> 8748 <sup>1</sup>	9309 <sup>1,*</sup>		8764 <sup>1,*</sup> 8774 <sup>1</sup>	
		11				8775 <sup>1</sup>	
		12	97471	00151 *		97681	
		15	8749 <sup>1</sup>	93151,*		8766 <sup>1,*</sup> 8776 <sup>1</sup>	
	<u> </u>	17 19		93191,*		9769 <sup>1</sup> 8769 <sup>1</sup>	
	$\vdash$	27	8750¹	9327 <sup>1,*</sup>		8773¹	
		37	0.00			9767¹	
		51		8751 <sup>1,*</sup>		5.5.	
							·


- 1 Audio, Control & Instrumentation Cables
- 2 Special High Temperature Control & Instrumentation Cables
- 3 Circuit Integrity (CI) Fire Alarm Cables
- 4 Circuit Integrity In Conduit (CIC) Fire Alarm Cables
- 5 Rubber and Oil-Resistant Rubber SO Power & Control Cables
- 6 Fire Alarm Cables

- 7 MIL-W-16878/4 (Type E) Control & Instrumentation Cables
- 8 MIL-W-16878 (Type B) Communication & Instrumentation Cables
- \* Solid Conductors
- \*\* Solid Conductors, Suitable For Direct Burial

BLACK Low Temperature

RED High Temperature

## Be Certain with Belden



# Belden Classic Audio, Control and Instrumentation Cables — High and Low Temperature (continued)

	Shielding	9		Uı	nshielded					Overall B	eldfoil			Overall Foil/Braid	Individual Foil	Overall Braid	
AWG	Cond	Pair															
20	1															83306E <sup>7</sup> 996	31 <sup>8</sup>
	2			85	5220 <sup>2</sup>			98021,**			85230 <sup>2</sup>	83393 <sup>2</sup>		836021		83320E <sup>7</sup> 996	
	3							98031,**		8772 <sup>1</sup>	85240 <sup>2</sup>					83335E <sup>7</sup> 996	33 <sup>8</sup>
	4			484¹										836041		83350E <sup>7</sup> 996	34 <sup>8</sup>
	5		9445 <sup>1</sup>														
	6													83606 <sup>1</sup>		926	30¹
	7		9439 <sup>1</sup>														
	9		9455¹											83609¹			
	10		0.4571					9890 <sup>1,**</sup>						000401			0.41
	12 15		9457 <sup>1</sup> 9458 <sup>1</sup>					9894 <sup>1,**</sup>						83612 <sup>1</sup>		926	۱۱ز
	15	4							0.40.41	04541							-
	$\vdash$	1	8205¹					8762 <sup>1</sup>	94641	9154 <sup>1</sup>					94021		-
	$\vdash$	3	9750¹												9873 <sup>1</sup> 9883 <sup>1</sup>		-
		4	9730									85164 <sup>2</sup>			9013 9003		_
	$\vdash$	6	9751 <sup>1</sup>									00104			98741 98861		-
		8	0701									85168 <sup>2</sup>			0071 0000		-
		9	9752¹									00100			9875¹		
		11													9876¹		
		12													9877¹		
		15	9755¹												9879¹		
18	2		9571 <sup>6,*</sup>	53	320UM <sup>3, *</sup>	533	20UZ <sup>4, *</sup>	9574 <sup>6,*</sup>	5300FM <sup>3</sup>	5320FM <sup>3, *</sup>			5320FZ <sup>4, *</sup>	836521		83307E <sup>7</sup>	
	3										8770¹	88770¹		83653 <sup>1</sup>		83321E <sup>7</sup>	
	4				322UM <sup>3, *</sup>	88489 <sup>1</sup> 82489 <sup>1</sup>		9578 <sup>6,*</sup>	5302FM <sup>3</sup>	5322FM <sup>3, *</sup>	9418¹	89418 <sup>1</sup> 82418 <sup>1</sup>		836541		83336E <sup>7</sup>	
	5		84	465¹												83351E <sup>7</sup>	
	6				324UM <sup>3, *</sup>				5304FM <sup>3</sup>	5324FM <sup>3, *</sup>				83656 <sup>1</sup>			
	7		84	467¹													
	8				326UM <sup>3, *</sup>				5306FM <sup>3</sup>	5326FM <sup>3, *</sup>							_
	9			469 <sup>1</sup>										83659 <sup>1</sup>			_
	12			466 <sup>1</sup>										83662 <sup>1</sup>			
	15 19			468 <sup>1</sup> 619 <sup>1</sup>													_
	25			626 <sup>1</sup>													
	20		30		9740¹						88760¹						_
		1	8461 <sup>1</sup> 97		7740 <sup>1</sup>			8760¹	8760NH1	0.4601	87760 <sup>1</sup>					820	ายา
		'	0401 31		2740 <sup>1</sup>			0700	07001411	3400	82760¹					020	,0
	$\vdash$	2	Q-	156 <sup>1</sup>	-7 40						02700						
	$\Box$	3		690¹											9773 <sup>1</sup>		$\neg$
		4	9-	157¹											-		$\neg$
		5		159¹													
		6		691¹											9774 <sup>1</sup>		
		8		161¹													
		9		692 <sup>1</sup>											9775 <sup>1</sup>		
	$\vdash \vdash$	12	97	741¹											97761		
	$\vdash$	15		742 <sup>1</sup>											97771		-
		19	9,	743¹													

- 1 Audio, Control & Instrumentation Cables
- 2 Special High Temperature Control & Instrumentation Cables
- 3 Circuit Integrity (CI) Fire Alarm Cables
- 4 Circuit Integrity In Conduit (CIC) Fire Alarm Cables
- 5 Rubber and Oil-Resistant Rubber SO Power & Control Cables
- 6 Fire Alarm Cables

- 7 MIL-W-16878/4 (Type E) Control & Instrumentation Cables
- 8 MIL-W-16878 (Type B) Communication & Instrumentation Cables
- \* Solid Conductors
- $^{\star\star}$  Solid Conductors, Suitable For Direct Burial

BLACK Low Temperature
RED High Temperature



## Belden Classic Audio, Control and Instrumentation Cables — High and Low Temperature (continued)

	Shieldi	ng			Unshielde	ed				Over	all Beldfoi	I			Overall Foil/Braid	Individual Foil	Overall Braid	
AW	G Cond	Pair																
16	1																9951 <sup>8</sup>	83308E <sup>7</sup>
	2		9572 <sup>6, *</sup>	5200UZ <sup>4</sup>	5220UM <sup>3, *</sup>	5220UZ <sup>4,*</sup> 8	35102 <sup>2</sup> 35221 <sup>2</sup>	9575 <sup>6,*</sup>	5200FM <sup>3</sup>	5220FM <sup>3, 2</sup>	5200FZ <sup>4</sup>	5220FZ <sup>4, *</sup>		85231 <sup>2</sup>	83702 <sup>1</sup>		9952 <sup>8</sup>	83322E <sup>7</sup>
	3						35103 <sup>2</sup>						8618 <sup>1</sup>	85241 <sup>2</sup>	83703 <sup>1</sup>		99538	83337E <sup>7</sup>
	4		8620 <sup>1</sup>		5222UM <sup>3, *</sup>			9579 <sup>6, *</sup>	5202FM <sup>3</sup>	5222FM <sup>3, 7</sup>		5222FZ <sup>4,*</sup>			83704 <sup>1</sup>		9954 <sup>8</sup>	83352E <sup>7</sup>
	5		9620¹	9420 <sup>5</sup>														
	6														83706¹			
	7	-	86211	94225														
	8	-	9721 <sup>1</sup> 9621 <sup>1</sup>	9424 <sup>5</sup>			251002								007001			
	9	-		9424° 9425 <sup>5</sup>		Č	35109 <sup>2</sup>								83709 <sup>1</sup> 83712 <sup>1</sup>			
	15	+	8623 <sup>1</sup>	9425"											83715 <sup>1</sup>			
	16	+	0023	94275											03713			
	19	+	8624 <sup>1</sup>	JTLI											83719¹			
	20	1	002.	94295											00.10			
	25		96221															
		1	8471 <sup>1</sup>					8719 <sup>1</sup>										
14	2		9580 <sup>6,*</sup>		5120UM <sup>3,*</sup>	5100UZ <sup>4</sup> 5	5120UZ <sup>4,*</sup>	9581 <sup>6,*</sup>	5120FM <sup>3, 3</sup>	5120FZ <sup>4,*</sup>	5100FM <sup>3</sup>	5100FZ4			83752 <sup>6</sup>			
	3														83753 <sup>6</sup>			
	4			86271	5122UM <sup>3,*</sup>				5122FM <sup>3, 3</sup>	5122FZ <sup>4,*</sup>	5102FM <sup>3</sup>				83754 <sup>6</sup>			
	5			96231														
	6														83756 <sup>6</sup>			
	7	_		8628 <sup>1</sup>														
	12	٠.		8629 <sup>1</sup>														
		1	8473¹					8720¹										
12			9582 <sup>6,*</sup>	5000UZ <sup>4</sup>	5020UZ <sup>4, *</sup>	5020UM <sup>3, *</sup>		9583 <sup>6,*</sup>	5000FM <sup>3</sup>	5020FM <sup>3, 3</sup>	5000FZ <sup>4</sup>	5020FZ <sup>4, *</sup>	:		83802 <sup>6</sup>			
	3	1													83803 <sup>6</sup>			
	4	+				5022UM <sup>3, *</sup>			5002FM <sup>3</sup>	5022FM <sup>3, *</sup>		5022FZ <sup>4, *</sup>			83804 <sup>6</sup>			
	6	1	0.4771					07401							83806 <sup>6</sup>			
		1	8477¹					8718¹										

### **Find the Right Product for Your Application**

Belden Classic products are available from stock from Belden distributors. If the products above do not fit your application, Belden can also engineer specific constructions for your application.

Belden has recently introduced a new process for quoting, manufacturing, and delivering custom cable constructions. Our new process assures that when a request for quote is submitted to our newly formed "Quotation Services" group, the customer will be rewarded with:

- Quick Quote Turnaround Time
- Market Intuitive Pricing
- Low Minimum Order Quantities
- Short Product Delivery Lead Times

Please contact your Belden Sales Representative for further details.

#### **Other Legacy Products**

In addition to our Classic products, Belden also manufactures the following legacy constructions:

### Hook-Up & Lead Wire

- Many plastic and rubber insulations are included in Belden's product offering
- A wide variety of UL, CSA, and MIL-Spec designs are available
- A complete range of colors and AWG sizes can be ordered

### Computer Coaxial & Twinaxial Cable

- 50 Ohm, 75 Ohm, and 93 Ohm coaxial cable constructions for computer applications are available as standard product
- 78 Ohm, 100 Ohm, 124 Ohm, and 150 Ohm twinaxial cable constructions for computer applications are available as standard product

Portable Cordage Molded Cable Assemblies Flat Cable IBM Cable

- 1 Audio, Control & Instrumentation Cables
- 2 Special High Temperature Control & Instrumentation Cables
- 3 Circuit Integrity (CI) Fire Alarm Cables
- 4 Circuit Integrity In Conduit (CIC) Fire Alarm Cables
- 5 Rubber and Oil-Resistant Rubber SO Power & Control Cables
- 6 Fire Alarm Cables
- 7 MIL-W-16878/4 (Type E) Control & Instrumentation Cables
- 8 MIL-W-16878 (Type B) Communication & Instrumentation Cables
- \* Solid Conductors
- \*\* Solid Conductors, Suitable For Direct Burial

BLACK Low Temperature
RED High Temperature

CB0017