




**POLYCAB**

*Connection Zindagi Ka*

**CCTV**  
C A B L E S

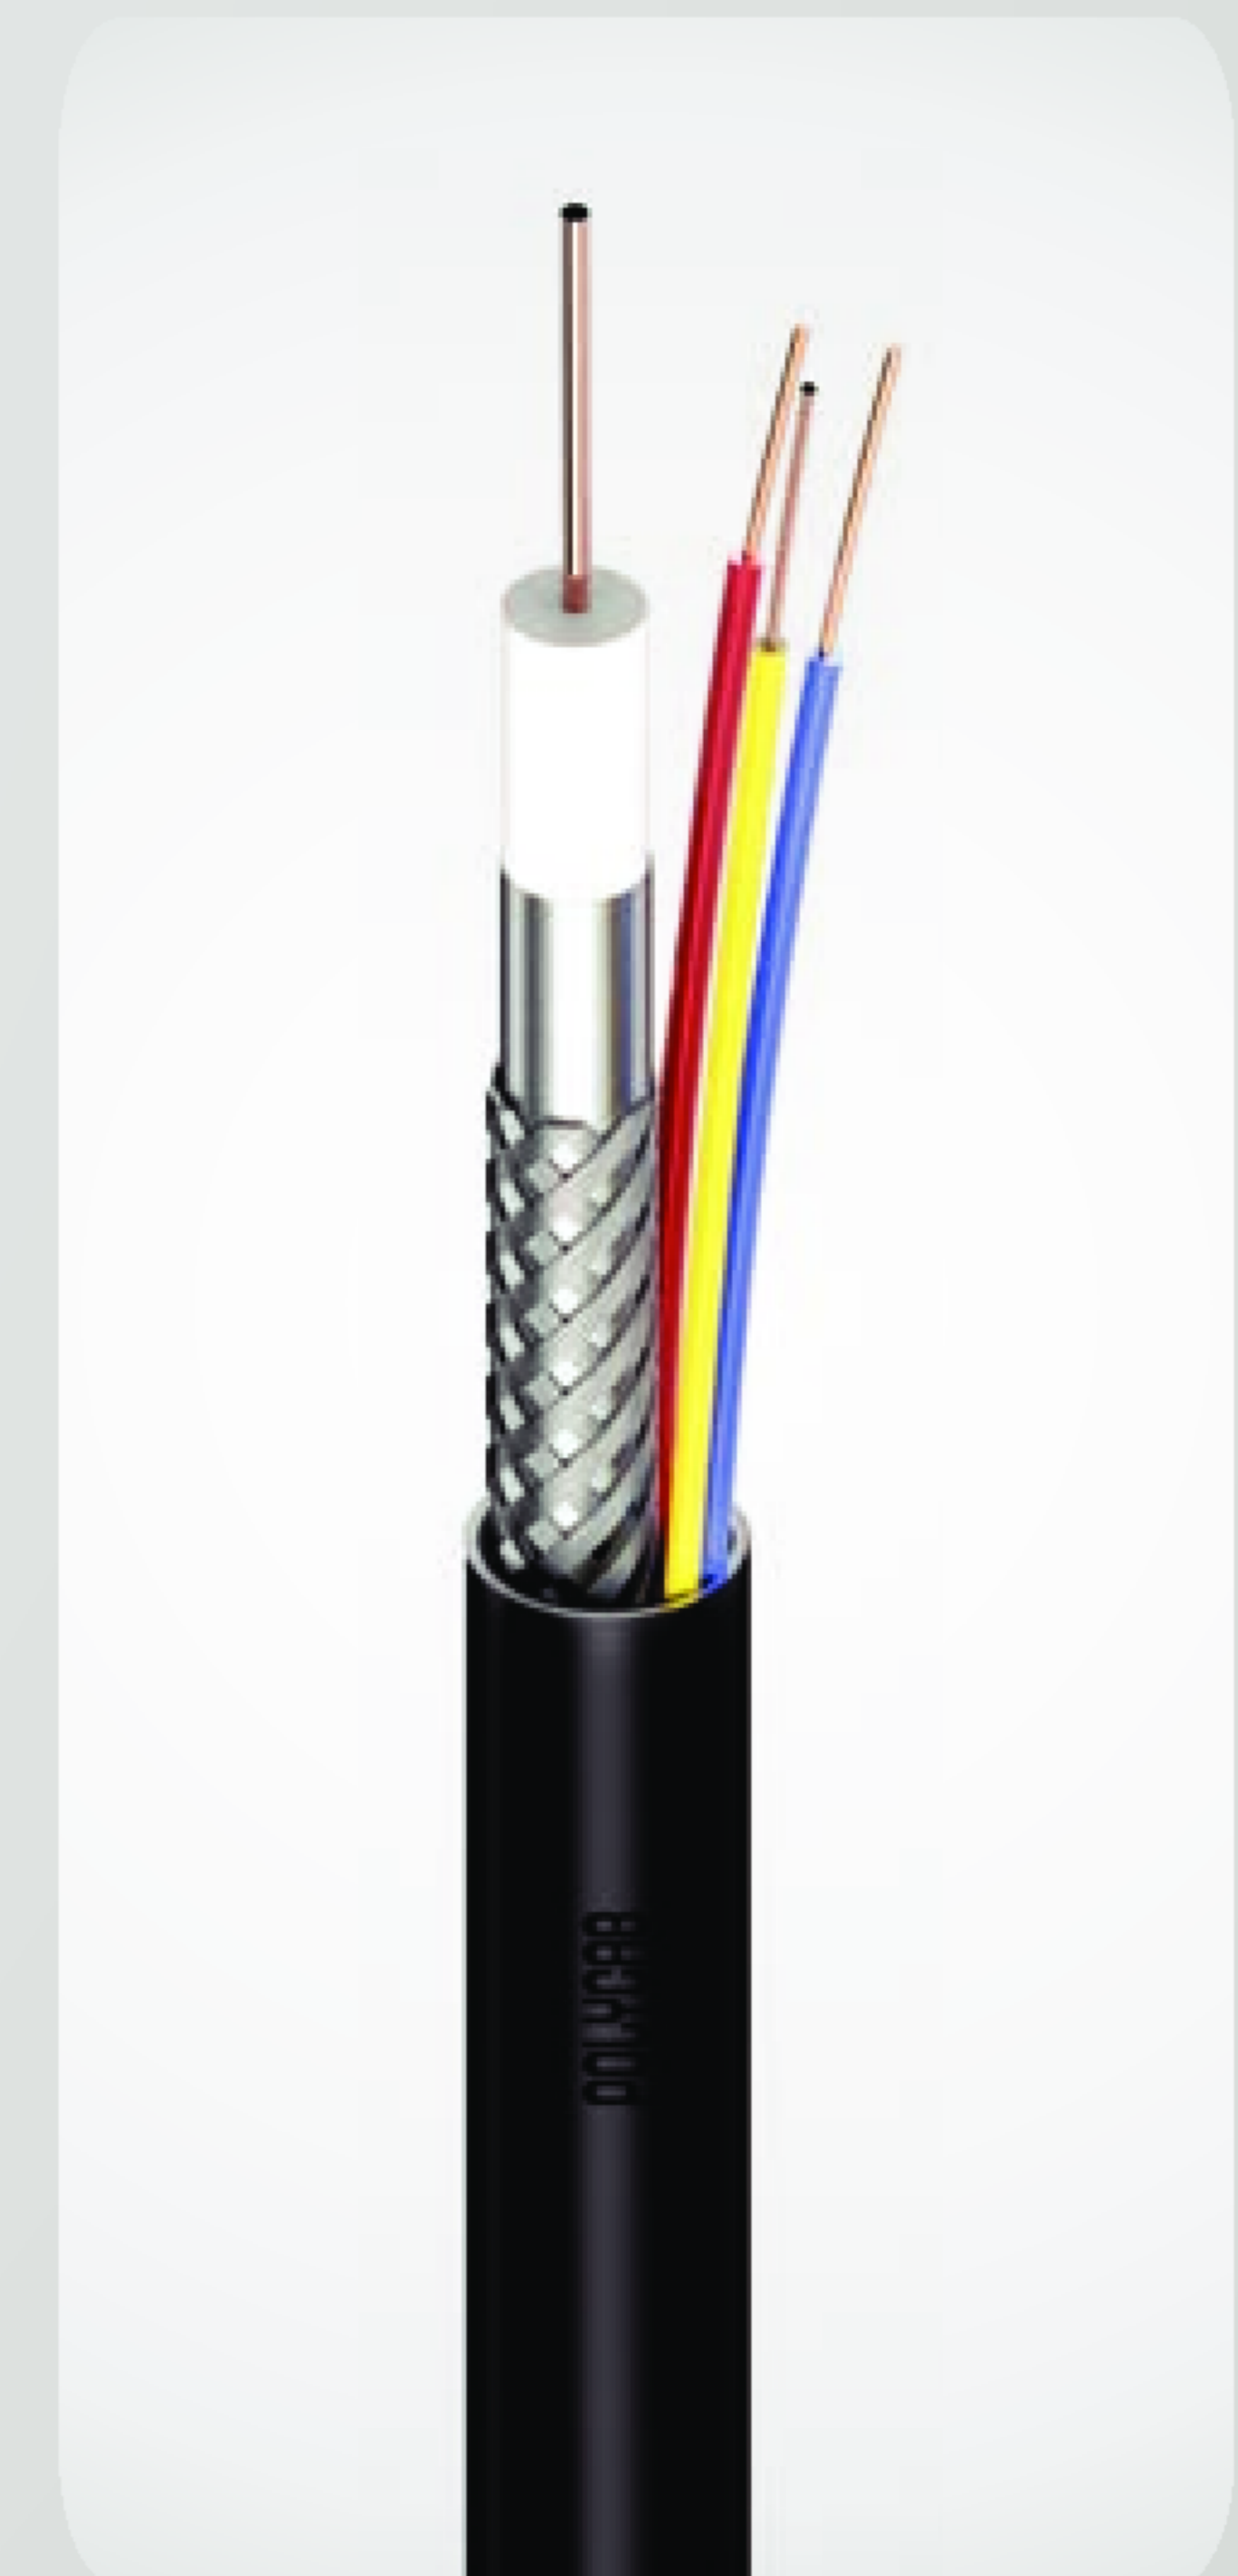

Transporting the clearest  
signals from the camera  
to your screens

Enhance your security measures with  
Closed Circuit Television (CCTV)  
Cables from Polycab

**AUTHORIZED LARGEST DISTRIBUTOR**

**PARADISE ELECTRICAL INDUSTRIES**

**Contact Us**

**Phone No.:** +91-70113 12643, +91-96259 32941

**Website:** [paradisespecialitycables.com](http://paradisespecialitycables.com)

**Email:** [available@paradisespecialitycables.com](mailto:available@paradisespecialitycables.com)





## POLYCAB CCTV

POLYCAB CCTV Cables are offered in two types namely 4+1 CCTV Cable and 3+1 CCTV Cable. Coaxial cables form the carrier for video signal and the other '4 cores' or '3 cores' form the carriers for power. Coaxial cables are designed to transmit the complete video frequency range with minimum distortion or attenuation, making them an excellent choice for CCTV. Polycab CCTV cables are designed to optimize the quality of video signals, which are transmitted through the Coaxial cable in the CCTV cable. The Coaxial cable consists of solid annealed bare copper conductor of electrolytic grade which is insulated with foamed dielectric, aluminium foil taped, jelly flooded, braided with Al. Alloy and then jacketed with UV PVC. Topmost quality of construction of coaxial cable in Polycab CCTV cables ensures distortion free video signals and thus a clear picture over complete low frequency bandwidth of transmission in such applications. The impedance of coaxial cable is 75, which matches the CCTV equipment. This matching ensures adequate signal strength, no reflection and best picture quality. In CCTV the coaxial cable is of type RG-59 which has highest attenuation compared to RG-6 and RG-11. Hence, it is recommended for use only for distances up to 300ft. Foamed dielectric delivers excellent electrical properties such as low capacitance and high velocity of propagation. This results in low-loss characteristics and reduced attenuation of the video signal. Aluminium foil and Al. Alloy braiding of 60% coverage ensures complete elimination of MEI/RFI from the video signals and also provides a reduced DC resistance ground path. Jacketing with UV PVC is ideal for all indoor and outdoor applications.



## DATA SHEET FOR CCTV CABLE

SR. NO.	CONSTRUCTION	MATERIAL/ UNIT	POLYCAB	POLYCAB
	<b>CABLE SIZE</b>	<b>POWER CABLE</b>	<b>CCTV Cable 4C+1</b>	<b>CCTV Cable 3C+1</b>
	<b>CABLE SIZE</b>		<b>0.5 MM</b>	<b>0.5 MM</b>
<b>1 a)</b>	<b>CONDUCTOR</b>	ABC		
	<b>NO OF STRANDS</b>	NOS	1	1
	<b>STRAND DIA (Nominal)</b>	MM	0.5 ± 0.02	0.5 ± 0.02
<b>2 a)</b>	<b>INSULATION</b>	HDPE		
	<b>THICKNESS (Nominal)</b>	MM	0.20	0.20
	<b>COLOUR</b>		Red, Yellow, Blue, Brown	Red, Yellow, Blue
		<b>CO-AXIAL CABLE</b>		
<b>1 b)</b>	<b>CONDUCTOR</b>	ABC		
	<b>INNER CONDUCTOR DIAMETER</b>	MM	0.80 ± 0.005	0.80 ± 0.005
<b>2 b)</b>	<b>INSULATION</b>	FOAM HDPE		
	<b>THICKNESS (Nominal)</b>	MM	1.375	1.375
<b>3</b>	<b>AL - FOIL</b>	AL - FOIL		
	<b>DIA OVER INNER SHIELD</b>	MM	3.75	3.75
	<b>WIDTH (Nominal)/COVERAGE</b>	MM%	15/100	15/100
<b>4</b>	<b>BRAIDING</b>	AL.ALLOY		
	<b>WIRE DIA (Nominal)</b>	MM	0.12	0.12
	<b>BRAIDING COVERAGE</b>	%	60	60
<b>5</b>	<b>CO-AXIAL OUTER SHEATH</b>	PVC ST3		
	<b>COLOUR</b>	BLACK	BLACK	BLACK
	<b>THICKNESS (Nominal)</b>	MM	0.40	0.40
<b>6</b>	<b>OVER ALL OUTER SHEATH</b>	ST3	PVC	PVC
	<b>COLOUR</b>	WHITE	WHITE	WHITE
	<b>THICKNESS (Nominal)</b>	MM	0.50	0.50

### AUTHORIZED LARGEST DISTRIBUTOR

**PARADISE ELECTRICAL INDUSTRIES**

**Contact Us**

**Phone No.:** +91-70113 12643, +91-96259 32941

**Website:** paradisespecialitycables.com

**Email:** available@paradisespecialitycables.com

